


## AUTO FILING MACHINE

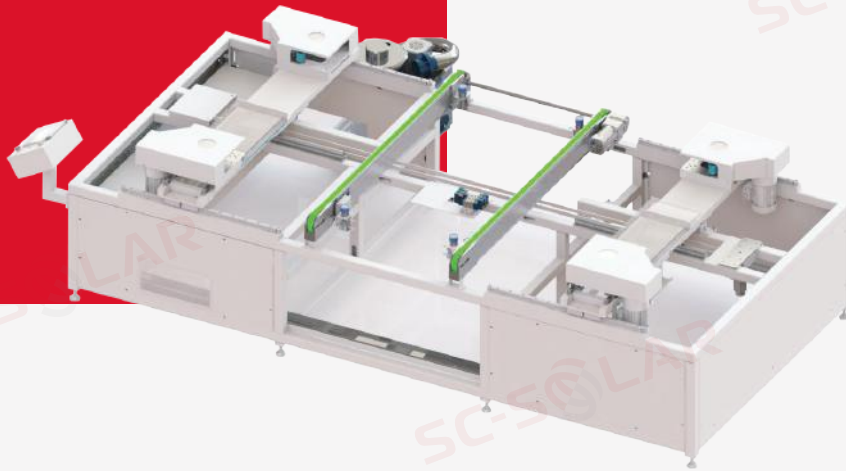

### Features

- Servo motor and synchronous belt drive, linear guide to ensure accurate and smooth operation.
- Automatic control of equipment, operation process without personnel intervention.
- Sand belt fast change structure, quick and convenient replacement.
- The four corners are filed at the same time, and the four corners are driven by the motor.
- Smooth section after filing corners, will not cause damage to the glass.

### Functionality

- Change time: ≤10min
- Sand belt service cycle: ≥30000 times
- Accuracy: ±1mm
- Noise: ≤80dB

### Specifications

Item	Value
Compatible module size	length: 1700-2550(mm); width: 990-1450(mm)
Feeding mode	LEL
Compatible module waveform range	0-5(mm)
Compatible module thickness	4-10(mm)
Tape specification	width: 30-40(mm); thickness: 0.06-0.10(mm)
Applicable edge type	Full edge double glass module, the length of tape head at the end is ≥50mm
Equipment power	<8kW
Power requirement	380V, 50Hz, AC±5%
CDA	0.6-0.8 (MPa), 300L/min
Dimension(L×W×H)	4200*2500*2100(mm)